

AVer VB130

Simply brighter and better

4K Video bar with intelligent lighting for Huddle Rooms

Product Specifications

4K optics lens, 120° FOV, up to 4X zoom
Sony 4K sensor: ultra-crystal-clear image in any lighting
Frame rates: (16:9) 4K, 1920 x 1080, 1600 x 900, 1280 x 720, 960 x 540, 848 x 480, 800 x 448, 640 x 360, at 60, 30, 15fps; (4:3) 1280 x 960, 800 x 600, 640 x 480 at 60, 30, 15fps
Adjustable audio fence: freedom to define your meeting area
Intelligent fill light: Automatically adjust lighting level to make you look energetic in virtual meetings in a dim environment*
SmartFrame: automatic FOV adjustment to fit all participants
SmartSpeaker: Voice triggered tracking people or specific preset areas.
Mirror, flip, AE, white balance: auto/manual override via PTZApp2
Minimum focus distance: 60 cm
People-counting API: enterprises and third-party software providers can obtain people-counting data for better understanding of meeting-space usage
10 camera presets (through remote control and IP web page)

*The best lighting distance is for people sitting within 1meter far from the camera

Beamforming microphone array: 5 microphones, 4 m pickup range
Echo cancellation
Noise suppression
Supports expansion microphone

12V/2A power adapter
Mini-B for expansion microphone connection
USB Type-B 3.1 connector, backward compatible with USB 2.0
RJ45 port for Ethernet
USB 2.0 Type-A for wireless connection*

*Optional wireless dongle is required to connect with mobile phone

YUV, YUY2, MJPEG
Network video compression format: H.264
Network protocols: RTSP, RTMP*

*When USB streaming is in use, RTSP and RTMP are not available.

3.1 Gen 1, backward compatible with USB 2.0
UVC 1.1 (USB video), UAC 1.0 (USB audio)

IR remote control
WebUI: IP access via Chrome browser (Chrome 76.x or later; Internet Explorer not supported)
UVC/UVA plug-and-play
PTZApp 2

Screen mount kit (included)
Camera wall-mount bracket (optional)

Windows® 7/10
MacOS X 10.7 or later
Google Chromebook™ version 29.0.1547.70

3.2 GHz Intel® Core™ i5-4460 processor
4 GB RAM or more
USB 3.1 port, backward compatible with USB 2.0

AC 100V–240V, 50/60 Hz
Consumption: 12V/2A

(Free Apps support on Windows® and Mac® computers)

EZManager 2: Camera Central Management Software
Remotely group FW/SW upgrades, control the camera, and manage settings

PTZApp 2: Camera Setting Software
View live video, people counting number, meeting interval information
Enable Skype for Business far-end control
Upgrade firmware automatically or manually
Control the camera
Set parameters and adjust the camera image
Diagnose operating status

EZLive: Broadcasting Software
Enjoy multi-camera real-time streaming, annotating, image capturing, and video recording

Operation temperature: 0 ~ 40°C
Operation humidity: 20% ~ 80%
Storage temperature: -20 ~ 60°C
Storage humidity: 20% ~ 80%

Package dimensions: 406(L)x146(W)x189(H) mm
Package weight: 2.358 kg
Camera: 350(L) x 65(H) x 75(D) mm/0.922 kg
Remote control: 149.72 x 42.3 x 19.29 mm/50g

VB130 unit
Power cable 10 ft (3 m)
USB 2.0 Type-B to Type-A Cable 15 ft (5 m)
QR code card
Screen mount and screws
Remote control
Tripod screw


Wall mount and mounting screws
10m/20m expansion microphone
10m/20m/30m USB 3.1 extension cable
USB 3.1 GEN1 Type-B to Type-A cable, 3 m

Camera: 3 years
Accessories: 1 year


Microsoft® Teams, Skype for Business, Skype, Zoom, Google Meet™, Intel® Unite™, RingCentral, BlueJeans, V-Cube, LiveOn, CyberLink U Meeting®, TrueConf, Adobe® Connect, Cisco WebEx®, Fuze, GoToMeeting™, Microsoft® Lync™, Vidyo, vMix, WebRTC, Wirecast, XSplit

*For 4K UHD support, please check system/hardware requirements with your software application provider.


**Specifications may vary depending on countries and are subject to change without notice.

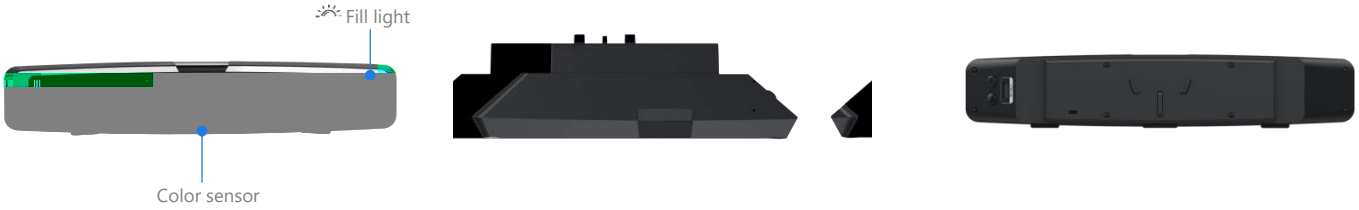



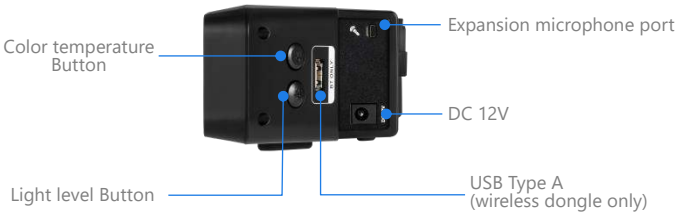





©2021 AVer Information Inc. All rights reserved.
All brand names and logos are trademarks of their respective companies.

www.aver.com