ÉCRANS INTERACTIFS VIEWBOARD

IFP7551


Clé **Caractéristiques**



- Annotation instantanée «Write Away», améliorée par le rejet du toucher et de la paume de la main à 50 points pour une écriture précise.
- Système de haut-parleurs avec une puissance de sortie totale de 70 W et un réseau de 8 microphones intégrés, pour un son riche et immersif.
- Certifié EDLA avec Android 14, logiciel éducatif ViewSonic intégré pour des fonctionnalités fluides.
- Connexion NFC et SSO pour un accès rapide aux applications de lancement et aux paramètres personnalisés.
- Certifié EPEAT Silver pour une meilleure efficacité énergétique et une plus grande durabilité.

Produit **Description**

Offrez des performances écoénergétiques à votre salle de classe grâce à la série ViewBoard® IFP51, disponible dans des tailles allant du 55 au 98 pouces pour s'adapter à toutes les configurations. L’interactivité est à portée de main, grâce à sa technologie tactile ultra-réactive à 50 points et à l'annotation instantanée « write away». Fonctionnant sous Android 14 et certifié EDLA, il offre un accès sécurisé aux applications Google Play, et les fonctions de connexion NFC et SSO garantissent un accès instantané aux paramètres personnalisés. Le logiciel éducatif ViewSonic intégré complète l'expérience grâce à des outils de tableau blanc, de partage d’écran et de gestion des appareils, offrant ainsi une expérience pédagogique plus dynamique et plus efficace.

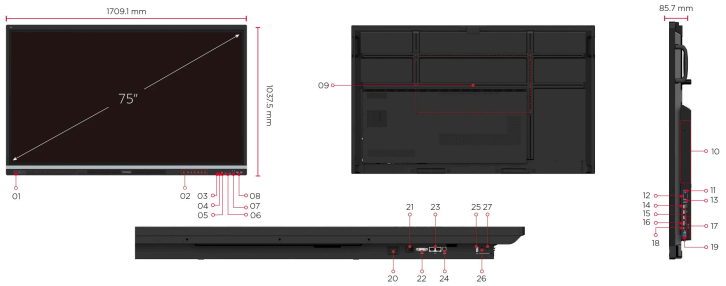

1. NFC
2. Control Button
3. Remote Control Receiver
4. Ambient Light Sensor
5. USB Type-C
6. HDMI x 2
7. Touch 2
8. USB 3.2 Gen 1 x 2
9. VESA® Wall Mount 800 x 400 mm
10. OPS Slot
11. Touch 1
12. Micro SD
13. USB 3.2 Gen 1 x 2
14. HDMI Out
15. HDMI x 2
16. DP In
17. WiFi Slot
18. USB Type-C
19. VGA
20. AC In
21. Power Button
22. RS232
23. LAN x 2
24. SPDIF
25. USB 2.0
26. Audio Out
27. Audio In

Visitez Nous www.viewsonic.com

AFFICHAGE

Taille de l'écran:	75"
Type de dalle:	TFT LCD Module with DLED Backlight.
Surface d'affichage (mm):	1650.24mm(H) x 928.26mm(V) (74.5”)
Rapport d'aspect:	16:9
Résolution:	UHD 3840x2160
Colors:	1.07G colors
Luminosité:	500 nits
Rapport de contraste:	1200:1 (typ.); 5000:1 (DCR)
Temps de réponse:	6.5 ms
Angles de visualisation:	H = 178, V = 178 typ.
Durée de vie du rétroéclairage:	50,000 Hours (Min)
Traitement de surface:	Hardness:9H, AG+AF
Orientation:	Landscape

PLATE-FORME

Processeur:	Octa-Core CPU
RAM:	16GB
Stockage:	128GB

TOUCH

Type/ Technologie:	Ultra Fine Touch Techology (IR Recognition)
Résolution tactile:	32767 x 32767
Point de contact:	EDLA/Android/Windows: 50 points of touch
Palm Rejection:	Yes

INPUT

HDMI:	x4 (Frontx2:HDMI2.1 with CEC,HDCP ; Rearx2: [(HDMI2.1 with CEC, HDCP)x1+(HDMI2.1 with CEC, HDCP, ARC)x1]
RGB / VGA:	x1
DisplayPort:	x1
Audio:	x1
RS232:	x1
CARTE SD/SDHC:	TF Card Slot(Micro SD)
OPS:	x1 PC Slot

OUTPUT

HDMI:	x1 (HDMI 2.1, HDCP 1.x)
Audio:	x1 (Line out)
SPDIF:	x1 (optical)

LAN

RJ45:	x2

USB

Type A:	x5 (Front x2 and Rear x 2 with USB3.2 Gen 1, all support SmartPort USB ; Rear x 1 with USB 2.0 for system update)
Type B:	x2 (Front x 1 and Rear x 1 with USB3.2 Gen 1)
Type C:	x3 (Frontx1 with USB3.2 Gen 1, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.2 Gen 1, DP1.2, Ethernet 100M, PD 15W; Topx1 with USB3.2 Gen 1, PD 15W)

HAUT-PARLEURS

25W x 2 front soundbar + 20W x 1 subwoofer

MICROPHONE

Built-in 8-array microphone

TOP CAMERA PLATE

Yes

COMPATIBILITY

RGB PC/HDMI PC:	1920x1080 @ 60Hz
HDMI:	3840x2160
DisplayPort:	3840x2160

SYSTèME D'EXPLOITATION EMBARQUé

EDLA-certified with Android 14

BUNDLED SOFTWARE

Logiciel d'annotation de base:	myViewBoard for Android
Logiciel d'annotation Pro:	myViewBoard for Windows (embedded in VPC)
Présentation Sans Fil:	AirSync
Device Management:	Manager
ViewSonic Launcher:	Yes

FONCTIONS SPéCIALES

All-in-one USB port:	USB 3.2 Gen 1 “SmartPort USB” to all channels
Partage simple du réseau local entre l'IFP et l'appareil encastré:	10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000)
Light Sensor:	Yes
NFC Reader:	Yes
Pen Sensor:	Yes

ALIMENTATION

Tension:	100-240V AC +/- 10% Wide Range
Consommation:	On: 99.84W ; Off:< 0.5 W

ERGONOMICS

Montage mural (VESA®):	800 x 400

OPERATING CONDITIONS

Température (° C):	0°C to 40°C
Humidité:	20% ~ 80% RH non-condensing

DIMENSIONS (L X H X P)

Physique (pouces / mm):	67.29 x 40.85 x 3.36 in / 1709.1 x 1037.5 x 85.5 mm
Emballage (pouces / mm):	73.35 x 45.79 x 8.86 in / 1863 x 1163 x 225 mm

WEIGHT

Net (lb / kg):	101.54 lb / 46.06 kg
Brut (lb / kg):	126.88 lb / 57.55 kg

REGULATIONS

cTUVus, FCC ID/IC ID, FCC SDoC, Energy Star 8.0, EMC/CE, CB/LVD, GOST-R/EAC, UkrSEPRO, EPEAT Silver, UK-EEL, BSMI, BIS, LBL(Low Blue Light Certification), Flicker Free, RoHS, ErP-Eco, REACH, SCIP, WEEE, TPCH , Packing waste, CA65, PAIA

CONTENU DE L'EMBALLAGE

1. Power Cord x1 3 meters,

2. USB Type-C cable x1 1.8 meters

, USB-IF certified

3. USB Touch cable x1 3 meters

4. Touch pen (Passive pen) x 2

5. Quick Start Guide

6. RS232 adapter x1

7. Clamp x 5

8. Camera Plate x1

9. Screw x 8 (camera 2+2, wall mount 4)

10. HDMI cable x1 3meters,

(HDMI LA certified)

11. Remote controller x1

12 AAA battery x2

13. Compliance statement

PC COMPATIBLE à ENCASTRER

VPCF5-W33-G1,
VPC37-W53-G1,
VPC35-W53-G1,
VPC-A31-O1

Copyright © ViewSonic Corporation 2000-2025. All rights reserved.